





Lily: +86 15933619081

Email: Lily@mnskj.com
















01

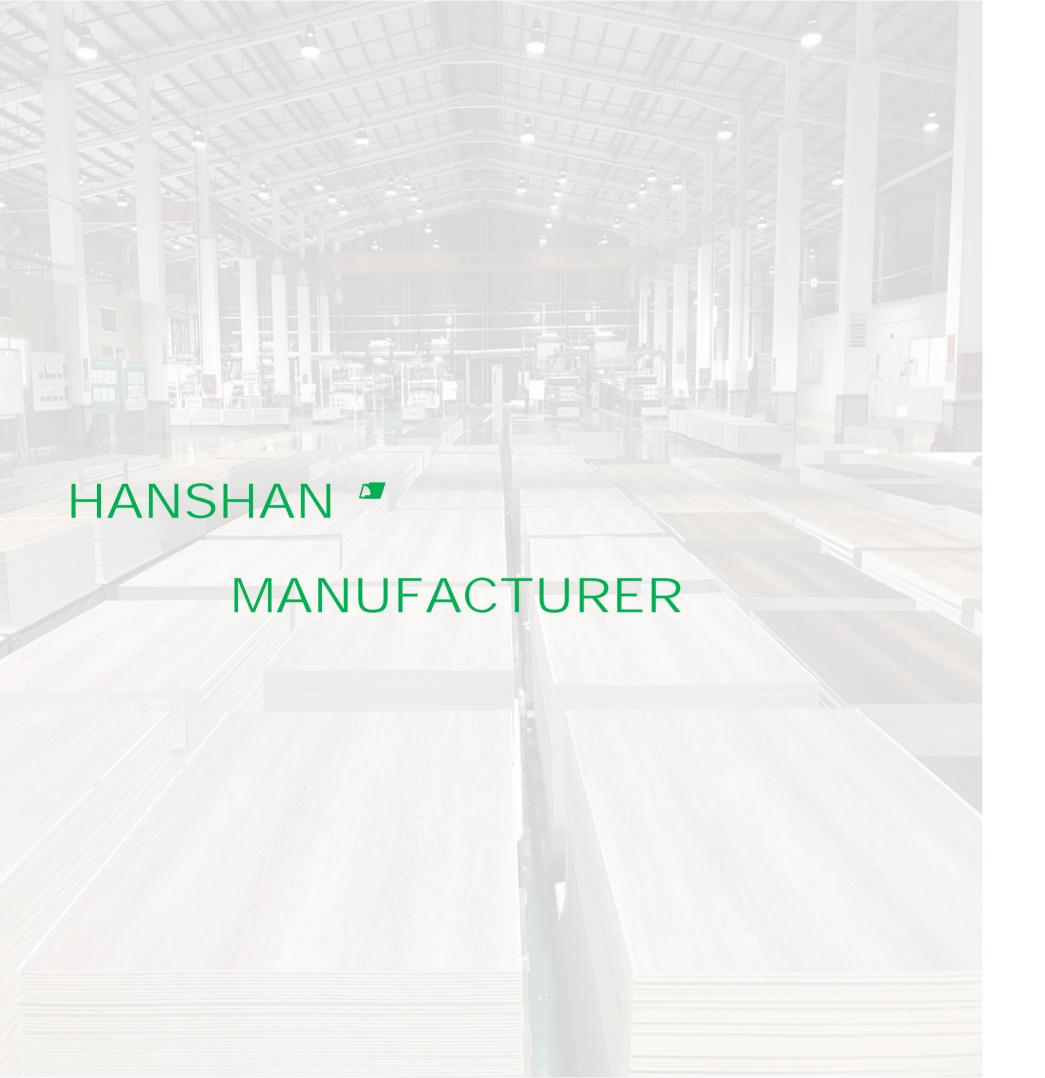

Vinyl	Flooring

SPC Flooring

LVT Flooring 05

Flooring Accessories

SPC Flooring Accessories 07

Wall Panel


SPC Wall Panels 11
WPC Wall Panels 15

MDF Acoustic panel

Acoustic Panel 17

Outdoor

WPC Cladding	19
WPC Decking	2
WPC DIY Decking	23

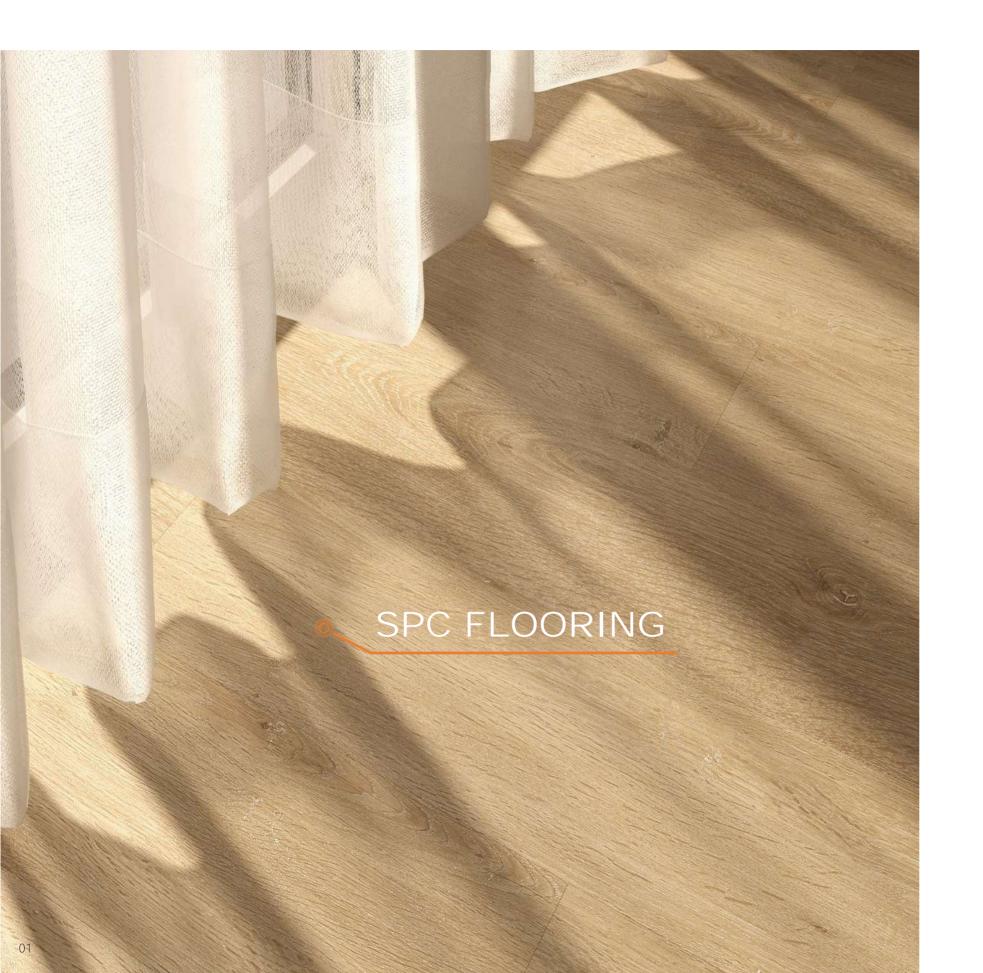





HS-1701

HS-1913













HS-1976







HS-1755 HS-1969-36 HS-1969-51

SPC Flooring Specification

Item	Detection Result
Dimension	151 x 920mm; 230 x1500mm; 184 x 1220mm, 313 x 620mm (Customization)
Thickness in total	3.2–12 mm
Thickness of wear layers	0.1–0.7 mm
Special treatmentl	Painted V-groove, soundproof IXPE / EVA
Surface treatment	Deep embossed, EIR, Crystal, Wood grain, Flat, Stone
Material	100% virgin material
Click systeml	Unilin click system
Color	We have several hundreds of color for your choice.

Our Certification



Välinge Flooring









SGS

We provide free designs based on your needs-Sales tool customization



Customized packaging box






Customized LOGO / Sample Books




Display racks

Wood Series









HS-2173 HS-2209 HS-2172









HS-2266 HS-2242 HS-2407 HS-2237










HS-2435

Stone Series







Smoke Stone



LVT Flooring Types

Dry Back Flooring-Glue Down LVT

Thickness: 1.5mm, 2mm, 2.5mm, 3mm

Wear Layer: 0.2mm, 0.3mm, 0.5mm

Size: 12 * 24 ,6 * 36 , 7 * 48 , 7.25 * 48 , 9 * 48



Loose Lay Flooring

Thickness: 4mm, 4.5mm, 5mm

Wear Layer: 0.3mm, 0.5mm, 0.7mm

Size: 7 * 48 , 7.25 * 48 , 9 * 48



Self Adhesive Floor - LVT Sticker

Thickness: 1.5mm, 2mm, 2.5mm, 3mm

Wear Layer: 0.2mm, 0.3mm, 0.5mm

Size: 12 * 24 ,6 * 36 ,7 * 48 , 7.25 * 48 , 9 * 48



LVT Click Flooring

Thickness: 4mm, 4.5mm, 5mm, 6mm

Wear Layer: 0.3mm, 0.5mm, 0.7mm

Size: 7 * 48 , 9 * 48



Wood Series -









AMERICAN OAK

CARNELIAN

CLIFFSIDE









Heritage Oak

SANDY OAK STEPS + RISERS

Stone Series










Noir


Whitestone

Travertine









Bone Quartz

CHARCOAL QUARTZ

GRAY QUARTZ

FLOOR ACCESSORIE







Reducer









JF139#

Stair Nose






















STAIR TREAD

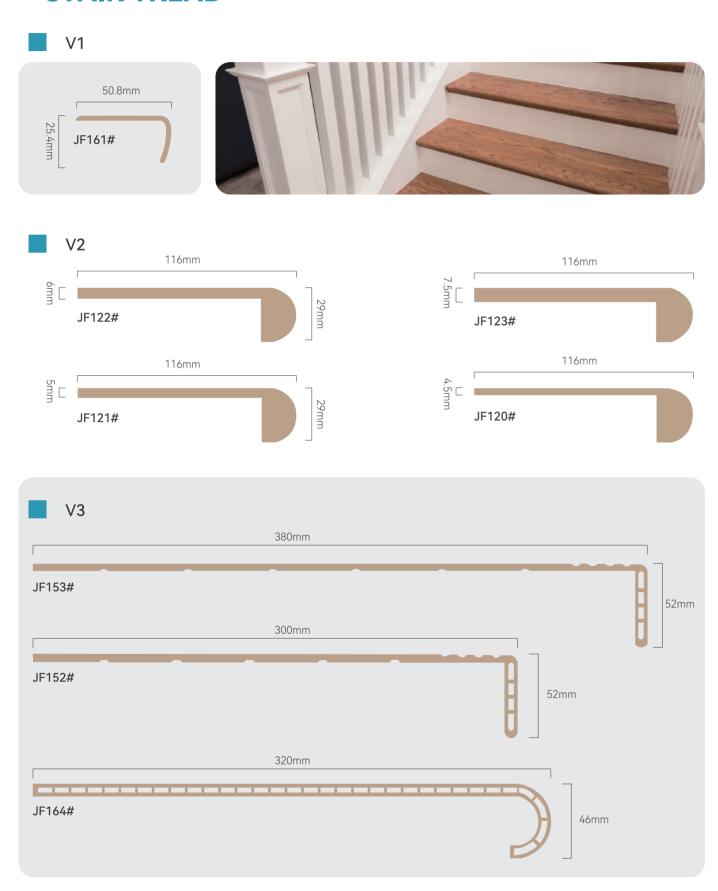

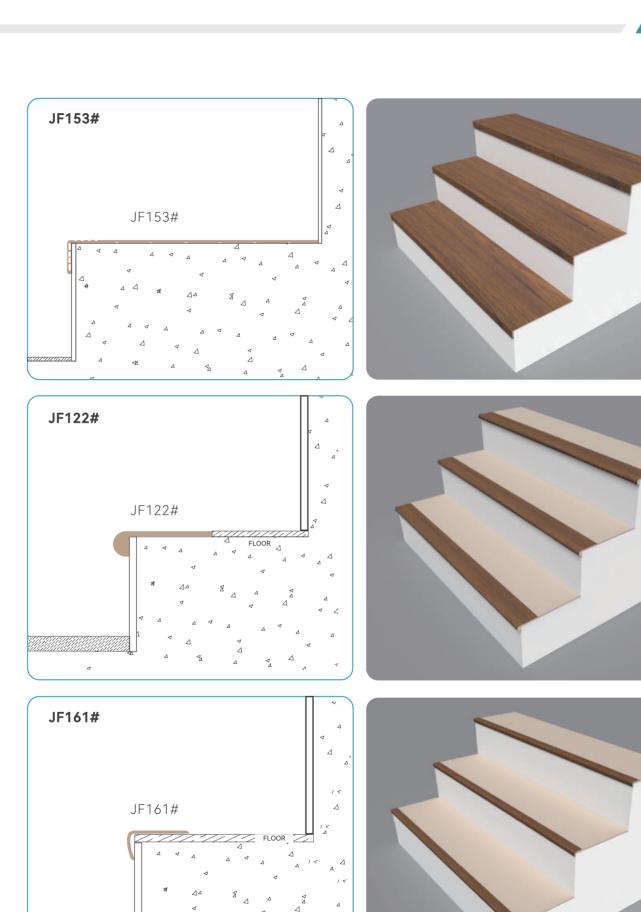

SPC WALL PANEL

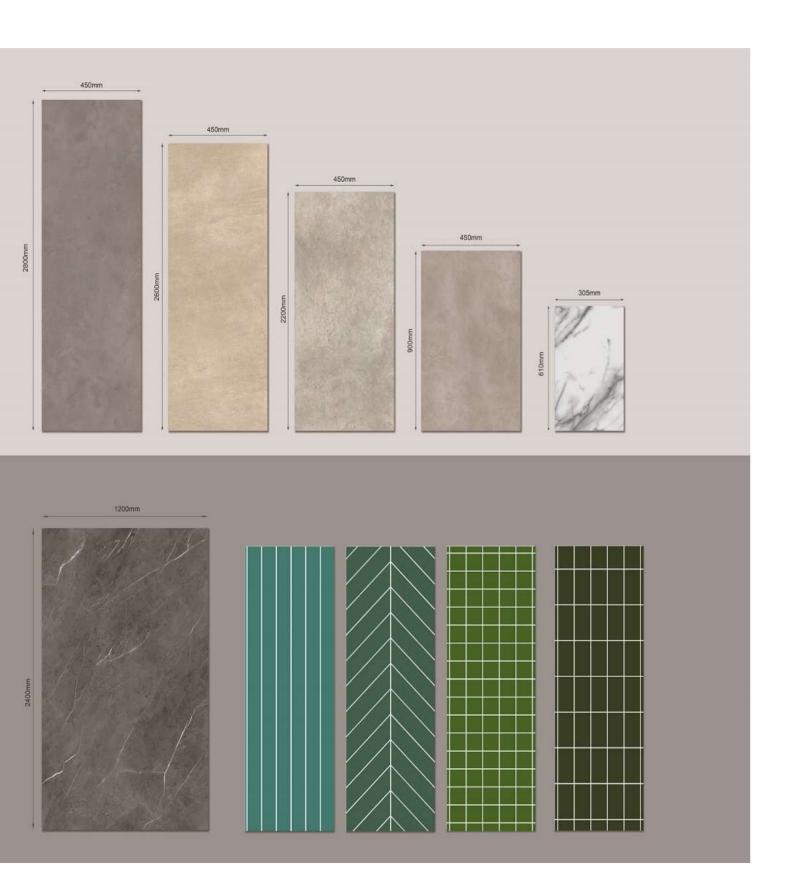



SPC Wall Panel Specification

Color	We have several hundreds of color for your choice.
Thickness	4.0mm 4.5mm 5.0mm
Wearlayer	0.1-0.3 mm
Sizel	2400x600mm, 2800x600mm, 2400x1200mm, 2800x1200mm (Customization).
Top Wearlayer	0.1mm, 0.2mm, 0.3mm
Surface Treatment	Matte, Glossy
Material	100% virgin material
Click System	Unilin Click or T&G Click (Optional)
Installation Method	Click system plus Structural Glue

SPC WALL PANEL





















O WPC WALL PANEL




O WPC 3D WALL PANEL

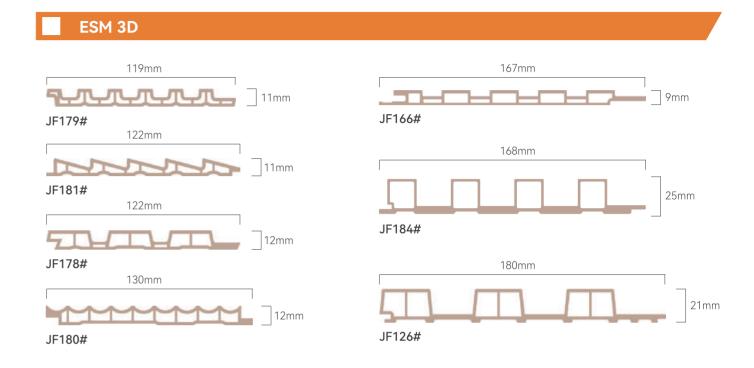


PVC Films

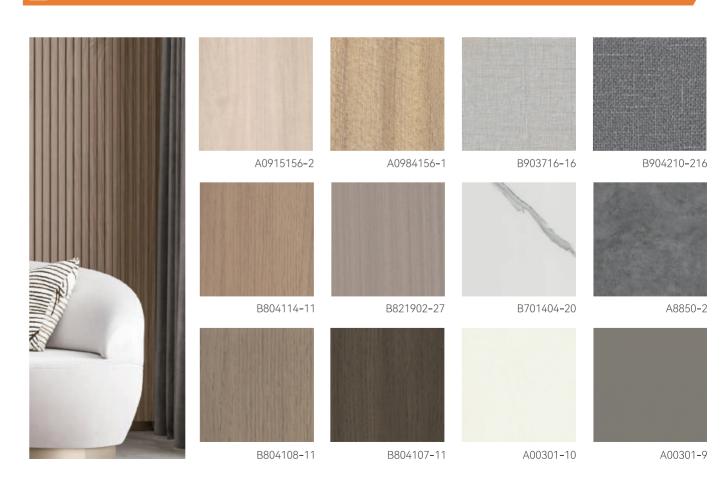

MDF ACOUSTIC PANEL

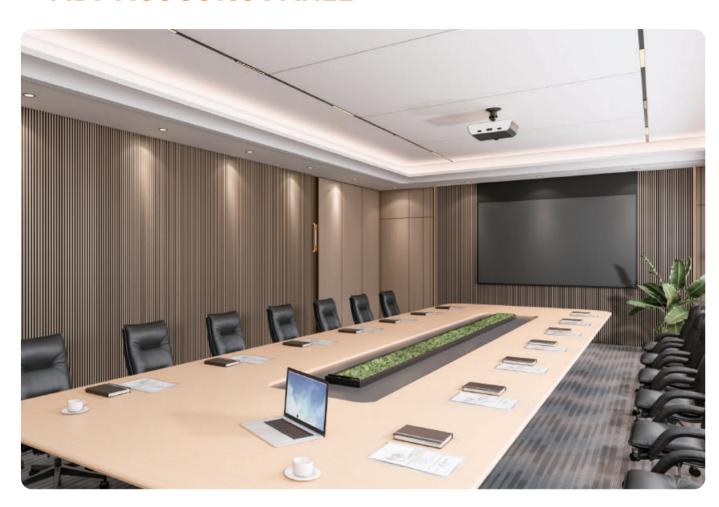


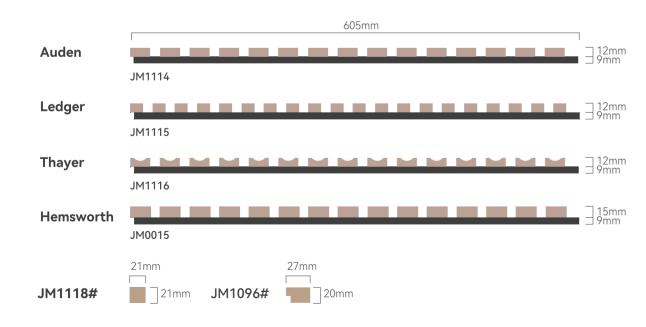









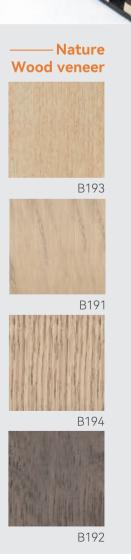

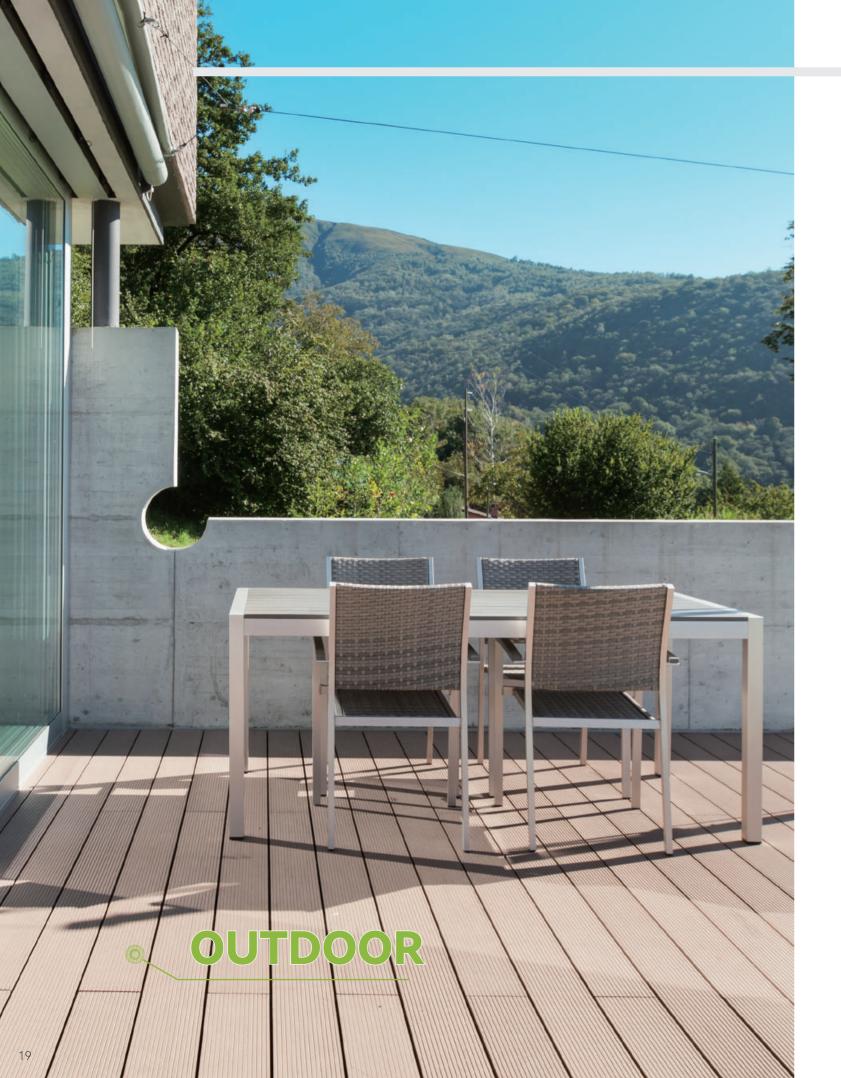



• WPC CLADDING

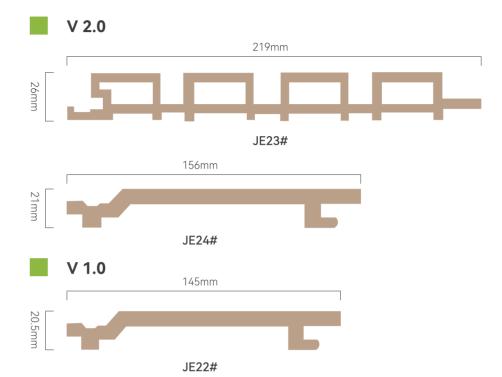



WPC DECKING & WPC FENCING

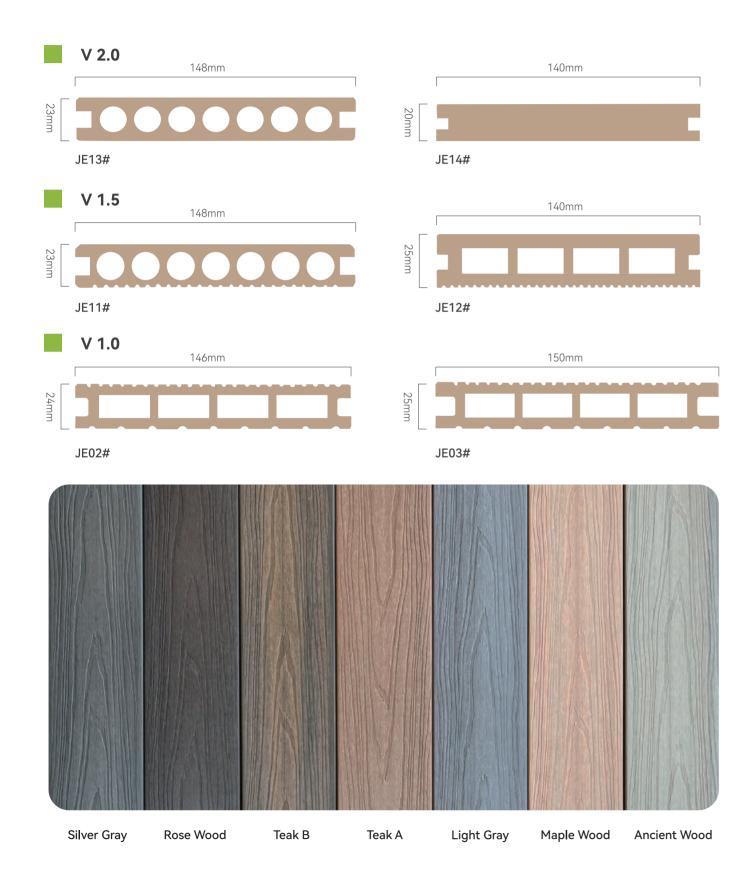

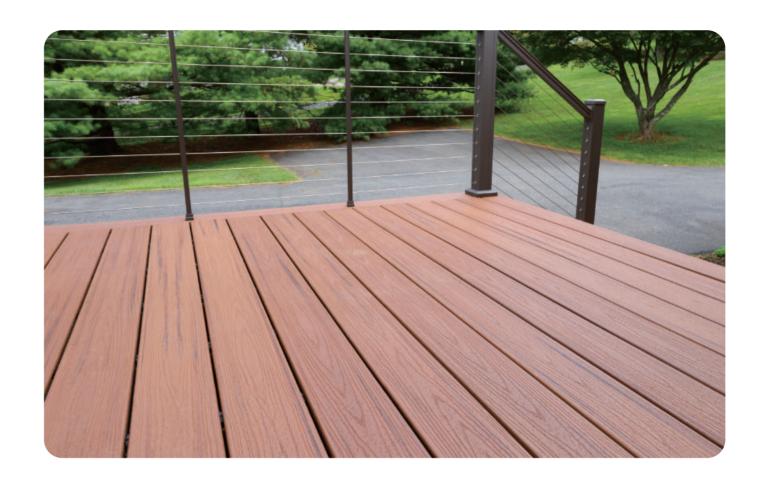



O WPC DIY DECKING





